

OCTAVE ULTRASONIC

AS4747 and NMI
Pattern Approved
Water Meter



2022
v1.0

 **NETAFIM**™
GROW MORE WITH LESS

Octave Ultrasonic WATER METER

AS4747 & NMI Pattern Approved



The OCTAVE Ultrasonic Meters

A revolutionary, precise and ultra reliable ultrasonic bulk water meter with no moving parts. With superior hydraulic and batteries that last up to 15 years, the Octave is today's best choice for bulk meters.

APPLICATIONS

Utilities, Waterworks, Industrial and Agricultural applications

AVAILABLE SIZES

DN40 and DN50 (1½"-2") with polymer body

DN50-DN150 (2"- 6") with stainless steel body*

DN200-DN300 (8"-12") with cast iron body

STANDARDS

MID 2014/32/EU (based on OIML R49:2013, EN 14154 and ISO 4064:2014)

AWWA

WRAS

NSF

ACS

KTW

W-270

NMI-10

AS4747

CONSTRUCTION

Cast Iron - epoxy coated, stainless steel (SS316)* or highly reinforced polymer for 1½" and 2" (DN40 and DN50, only threaded version) All external bolts and nuts are made of stainless steel.

The size of the meter and the direction of flow are cast in raised letters on the outer surface of the case.

* DN50 with threads, DN50-DN150 only with floating flanges


TECHNICAL SPECIFICATIONS

Maximum Working Pressure	16 bar
Liquid Temperature	0.1 up to 50 ° C
Precision Class	ISO 4064 rev.2014, Accuracy class 2
Configuration	Compact - The display is built in to the unit
Power Source	2 D size Li-battery: up to 15 years life time
Environmental Protection	IP 68, Ambient operation temp. -25°C up to +55°C
Volume Display Options	1. Net (Forward less reverse) 2. Forward only 3. Reverse only 4. Forward & reverse alternating
Data Logger	Volumes and alarms data (48KB, 4130 data points)
Connections	1½-2" threaded: with couplings to NPT/ BSP 2"-12" flanged: flanges according to ISO, BSTD and ANSI 150
Severity Levels	Mechanical class M1 Electromagnetic environment class E1
Pressure Loss	ΔP 0.16 bar

OUTPUTS

Analog Output	<p>The Analog Output shows the currently measured flow rate. This output is a 4 - 20 mA current loop (the end user must supply power to the unit). The Analog Output is programmable for forward and reverse flow (see Operation Manual for more details). The 20mA point is programmable per customer request (To any flow lower than the max flow of the meter).</p>										
Digital (pulse) Output	<p>The Digital (pulse) Output is an open drain transistor output that provides pulse per quantity with these options:</p> <ol style="list-style-type: none"> 1. Two scaled forward and/or reverse mode pulses 2. One scaled forward pulse and one alarm frequency output 3. Measuring units of the output can be programmed different than displayed units <p>Pulse resolution will be shown on the display for each pulse separately</p>										
Dry Contact Output	<p>The Dry Contact Output is a dual mechanical relay output that provides pulse per quantity with these options:</p> <ol style="list-style-type: none"> 1. Two scaled forward and/or reverse mode pulses 2. One scaled forward pulse and one alarm frequency output 3. Measuring units of the output can be programmed different than displayed units <p>Pulse resolution will be shown on the display for each pulse separately. Onsite power supply of 5-35 VDC is needed.</p>										
SSR (Solid State Relay) Pulse output	<p>The SSR is a dual electronic relay output that provides pulse per quantity with these options:</p> <ol style="list-style-type: none"> 1. Two scaled forward and/ or reverse pulses 2. One scaled forward and one alarm frequency output 3. Measuring units of the output can be programmed different than displayed units <p>Pulse resolution will be shown on the display for each pulse separately. Onsite power supply of 5-35 VDC is needed.</p>										
Encoder Output	<p>The Encoder Output is a serial communication protocol utilizing UI1203 or UI1204 (Sensus protocol). Additional pulse output is available as an option.</p>										
Modbus Protocol Output / M-Bus	<p>The improved full Modbus/ MBus protocols include an optional pulse output and have the following available functions:</p> <table> <tr> <td>1. Alarms (battery, empty pipe)</td> <td>6. Current flow</td> </tr> <tr> <td>2. AMR serial number</td> <td>7. Flow direction</td> </tr> <tr> <td>3. Real Time Clock (RTC)</td> <td>8. Forward and reverse volumes</td> </tr> <tr> <td>4. Volume units</td> <td>9. Flow and volume resolution</td> </tr> <tr> <td>5. Flow rate units</td> <td></td> </tr> </table>	1. Alarms (battery, empty pipe)	6. Current flow	2. AMR serial number	7. Flow direction	3. Real Time Clock (RTC)	8. Forward and reverse volumes	4. Volume units	9. Flow and volume resolution	5. Flow rate units	
1. Alarms (battery, empty pipe)	6. Current flow										
2. AMR serial number	7. Flow direction										
3. Real Time Clock (RTC)	8. Forward and reverse volumes										
4. Volume units	9. Flow and volume resolution										
5. Flow rate units											
Analog Output + SSR(Solid State Relay)	<p>The SSR is a dual electronic relay output that provides pulse per quantity. The Analog Output shows the currently measured flow rate. This output is a 4-20 mA current loop.</p>										

DIGITAL DISPLAY

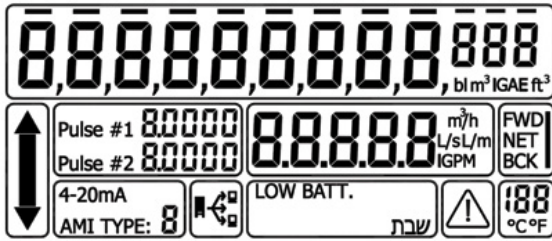

	Flow direction		Shabbat-Mode
	Flow rate units		System error
	Accumulator mode		Water temperature
	Communication mode		Output mode
	Low battery alert		Volume units
			Pulse resolution

DIGITAL DISPLAY

The vacuum sealed (IP68) digital display is equipped with the following:

- Forward & reverse flow notification symbol
- 12 digits accumulation volume
- Programmable decimal point for high resolution
- 4 digits for flow rate with automatic floating decimal point
- Programmable accumulation units available
- Programmable flow rate units available
- Alarm display for low battery and fault measuring

The digital display is identical for all sizes or models.

The digital display shall be programmed as ordered by the customer.


The transparent LCD digital display glass lens is made of molded heat treated 6 mm / ¼" glass to ensure against scratching and breakage. Serial number is permanently stamped Below the electronic digital display.

MEASURING PRINCIPLE

Imagine two identical swimmers crossing a river on the same diagonal line, one with the flow and the other against the flow.


The swimmer moving with the flow needs much less time to reach the opposite bank. Ultrasonic waves behave exactly the same way. The sound wave that flows in the direction of the stream moves faster than the one that flows against the stream.

The transit times TAB (Transit time of ultrasonic waves from sensor A to sensor B) and TBA (from sensor B to A) are measured continuously. The time difference (TBA - TAB) is directly proportional to the mean flow velocity (Vm) of the liquid. The flow rate is a result of the velocity multiplied by the cross section area of the flow tube size.



OCTAVE FEATURES

- Excellent long-term stability and reliability
- Rugged mechanical design - Submersible (IP68)
- Bi-directional - including bi-directional outputs (digital and analog)
- Flexible data formats including flow directions, flow rates and volumes
- AMR and cellular networks ready with alerts and statistic features
- Multiline LCD
- Programmable Display (units and outputs resolution)
- EMI / RFI Protection
- Glatt kosher

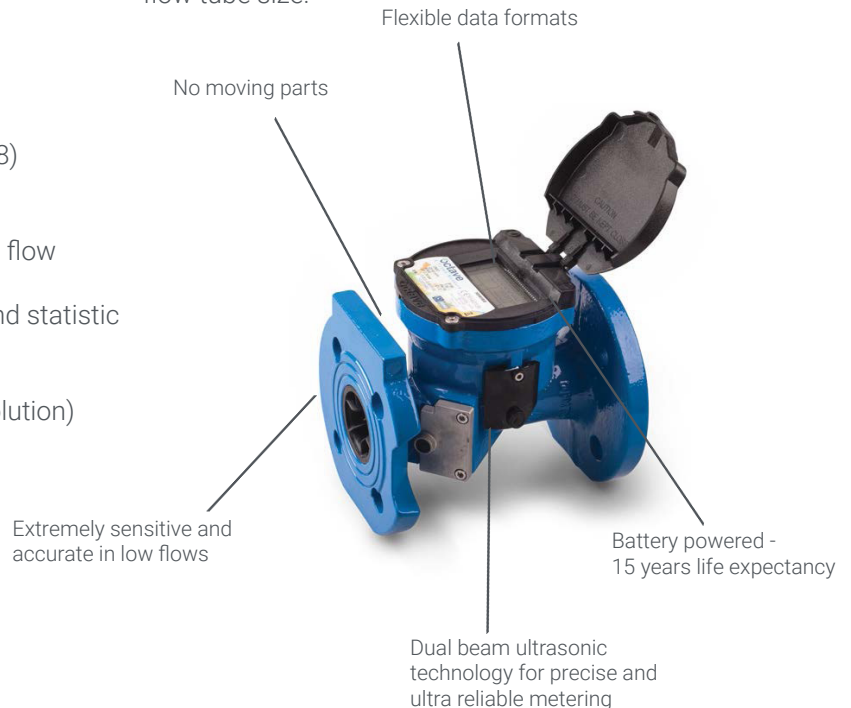

OCTAVE LINE-UP OF ADVANCED ULTRASONIC WATER METERING

The Octave family of products offers the water metering field advanced technologies with exceptional levels of accuracy which are suitable for four different applications:



GRID

Octave is a revolutionary precise and exceptionally reliable ultrasonic bulk water meter, perfectly suitable for large projects, as key meters in grids and DMA (District Metered Areas). The Octave combines superior hydraulic characteristics with advanced alert, data and statistical features.

- The world's leading solution for handling bulk flow rates
- Diameter sizes from 2" up to 12"
- Made with highly durable materials - epoxy coating, cast iron and more
- Reliability at the highest level

INDUSTRIAL

The Octave Stainless Steel is especially suited to water metering in challenging environments such as production plants, mining and industrial processes.

- Diameter sizes from 2" to 6"
- Reliable operation in harsh environments
- Suitable for handling aggressive water in industrial processes
- Low friction sensibility and high durability over time

DISTRICT

All of the recognized advantages of Octave, featuring with highly durable materials - cast iron complex, polymeric materials and a variety of new diameter sizes. Suitable for use in medium flow rates from apartment buildings to small neighborhoods/ housing projects:

- Polymeric version available in diameter sizes 1½" and 2"
- Reduced weight to ease load on the plumbing systems and prevent distortions
- Low friction sensibility and high durability time
- Cost effective
- Made from recyclable materials
- Sizes 2"- 4" in cast iron complete the range for district uses

AGRICULTURE


For agricultural appliances the Octave is perfectly suitable as main meter with it's high accuracy, low headloss, electronic information options and diverse electrical outputs.

- Diameter sizes from 2" up to 12"
- No moving parts
- Reliable and accurate


TECHNICAL INFORMATION - DIMENSIONS

Model		Octave									
Nominal Size	(mm)	40 Threaded	50 Threaded	50	65	80	100	150	200	250	300
	(inch)	1½ Threaded	2 Threaded	2	2.5	3	4	6	8	10	12
L - Length without couplings (mm)		300	300	200	200	225	250	300	350	449	499
W - Width (mm)		113	113	165	185	200	220	285	340	406	489
H - Height (mm)		155	155	194	210	210	223	282	332	383	456
h - Height (mm)		35	35	40	90	90	103	140	165	203	245
Weight (kg) - cast iron body			8	9	11.5	13	15	32	45	68	96
Weight (kg) - polymer body		1.4	1.45								
Weight (kg) - stainless steel body		4	4	6		7	9.5	16			

THREADED

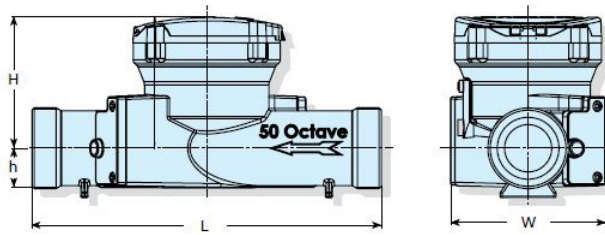


FLANGED

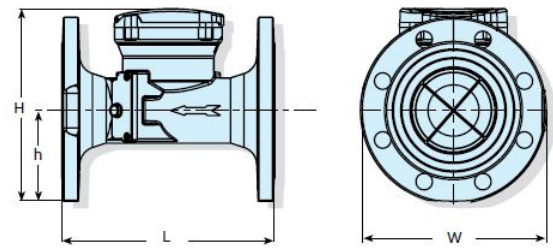

METER PERFORMANCE ACC. ISO 4064- REV. 2014

Flowrate m ³ /h	Meter size								
	DN 40 - 1½"	DN 50 - 2"	DN 65 - 2.5"	DN 80 - 3"	DN 100 - 4"	DN 150 - 6"	DN 200 - 8"	DN 250 - 10"	DN 300 - 12"
Q1 Minimum flow rate	0.160	0.080	0.080	0.125	0.200	0.500	0.800	2	2
Q2 Transitional flow rate	0.256	0.125	0.125	0.200	0.320	0.800	1.280	3.2	3.2
Q3 Permanent flow rate	40	40	40	63	100	250	400	1000	1000
Q4 Overload flow rate	50	50	50	80	125	313	500	1250	1250
Q3/Q1 (R)	250	500	500	500	500	500	500	500	500
Starting flow	0.025	0.025	0.025	0.025	0.025	0.2	0.2	0.5	0.5

HEAD LOSS CURVE 1½" - 12"

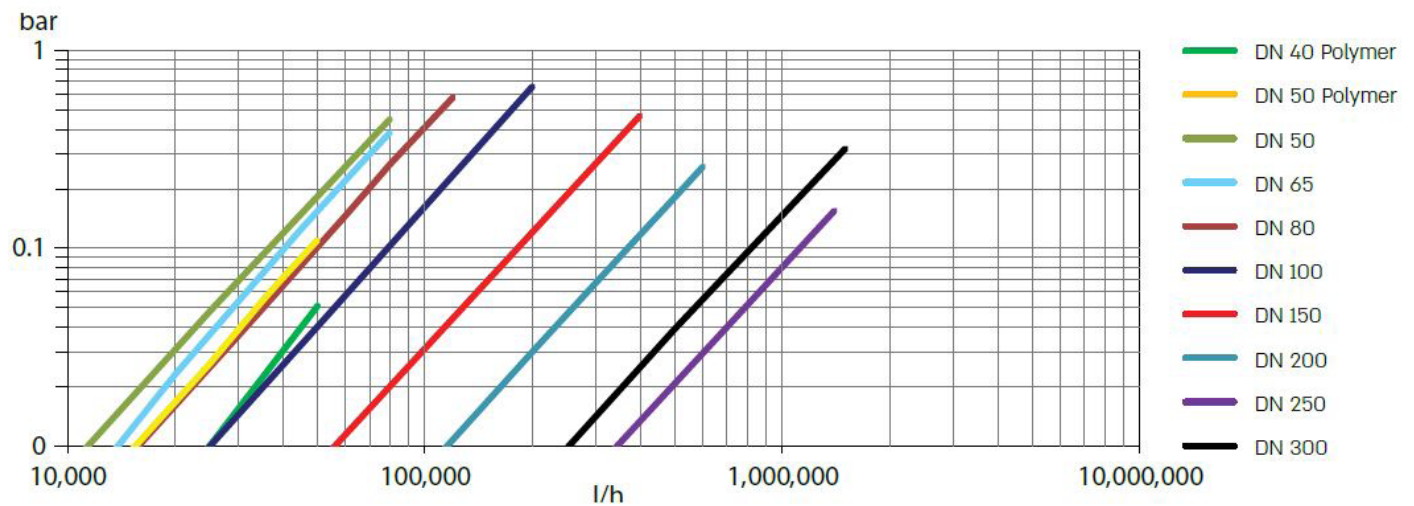

INSTALLATION REQUIREMENTS

- The meter must be full with water all the time
- For details view the installation manual
- The Octave meter requires a minimum of 0 diameters before and 0 diameters after
- NMI M10 Installation: Refer to Approval Certificate