




Standard Parts

- a. PR Pilot Model, 3110R
- b. PR Pilot Model, 3110F
- c. Self-Flushing, inline control-filter
- d. Isolation ball-valve
- e. SY3 – 3-pos selector valve (SY6 for 6" \ 150mm)
- f. Orifice Plate (DP of 3 mwc at the set-flow)

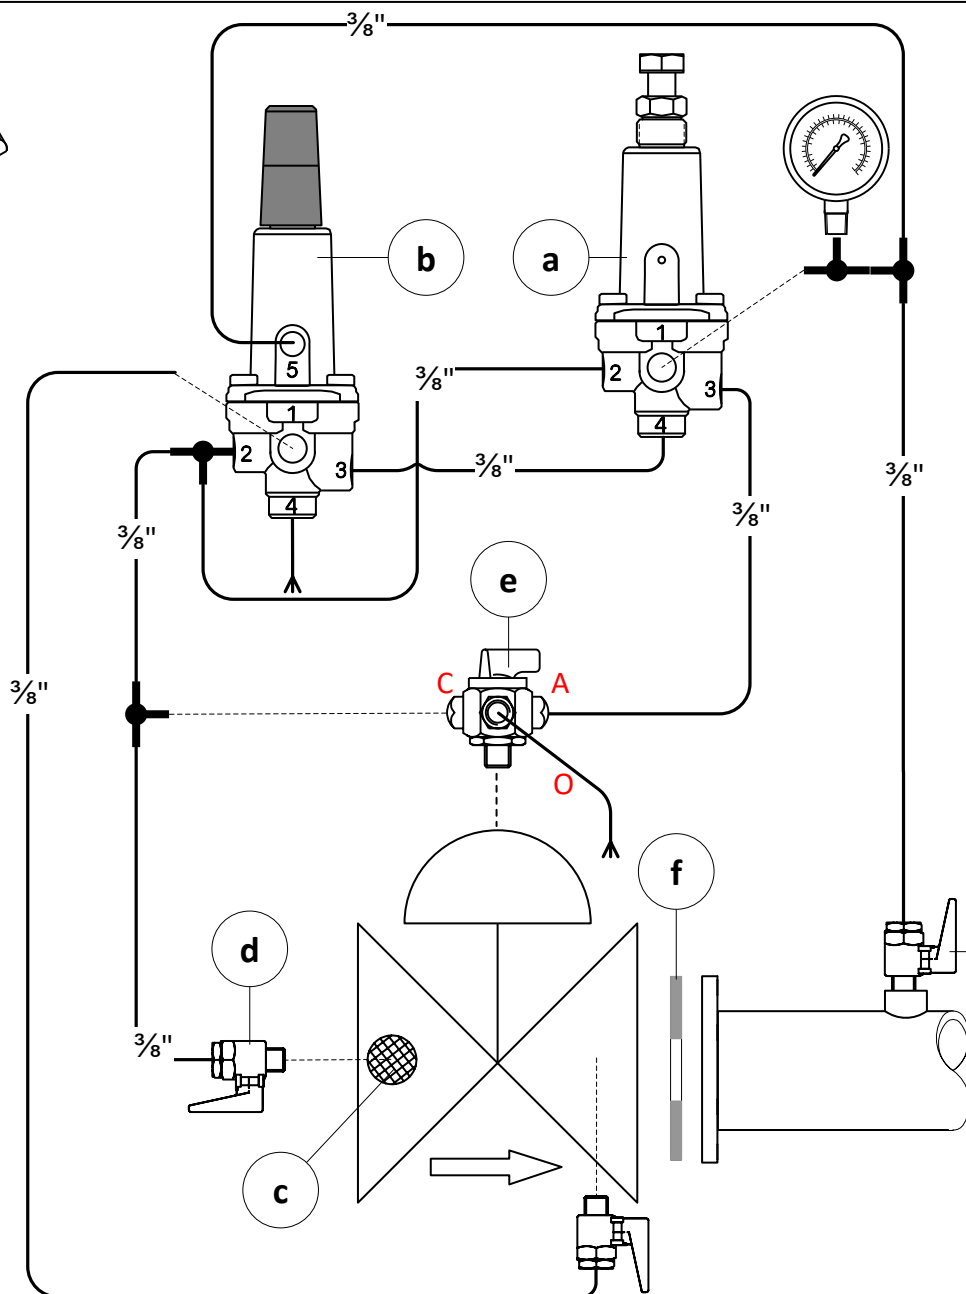

- | | | | |
|----|---|----|-------------------|
| a. | PR Pilot Model, 3110R | h. | NO solenoid valve |
| b. | PR Pilot Model, 3110F | b. | |
| c. | Self-Flushing, inline control-filter | c. | |
| d. | Isolation ball-valve | g. | |
| e. | SY3 – 3-pos selector valve (SY6 for 6" \ 150mm) | | |
| f. | Orifice Plate | | |
| g. | Pressure gauge | | |